


LH Xtreame Diver cable

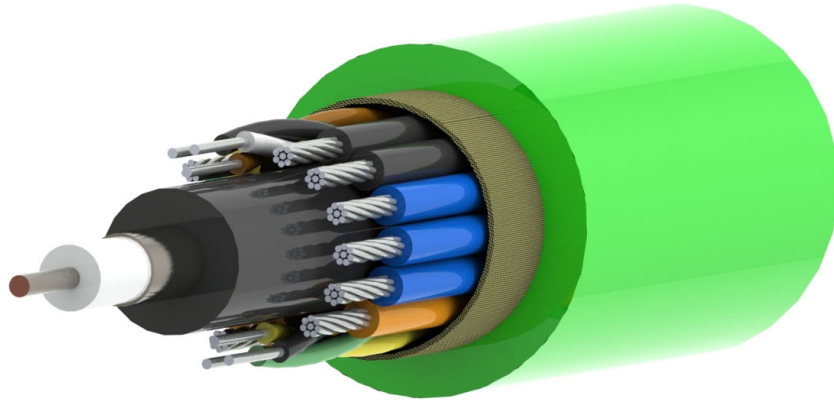

Professional Underwater Diver cable.
All in one cable for Video-Light-Diver Communication

TECHNICAL SPECIFICATIONS : Item number. 400-030

- Diameter 12,80 mm. Polyurethan jacket Neon green colour with Kevlar fiber braid.
- Shielded coax 75 ohm + 10 Core 0,33 mm² . + 2x2 0,20 mm² conductors twisted together.
- Breaking strength 4,9 kN. Working load max 1,23 kN.
- Weight in air 18,7 kg/100 meter. Weight in seawater 5,5 kg/100 meter.
- Temperature range -30°C - +80°C.
- Minimum Static bending radius 110 mm.
- Dynamic bending radius 160 mm.
- Available by the meter with mounted underwater connectors on customer request.

LHcamera
Underwater Video Systems